




Hunts Seven Day Water Absorption Test Findings

Start Date 7/22/08
 Conclusion Date 8/4/08

	Bottom Right*	Middle*	Top Left*
Cut Weight	1.094	1.109	1.099
Air Dried Weight	1.072	1.085	1.09
	Bottom Right	Middle	Top Left
Start Weight	1.072	1.085	1.09
1hour	1.582	2.747	1.861
Day 1	1.479	1.865	1.552
Day 2	1.483	1.806	1.519
Day 3	1.639	1.969	1.663
Day 4	1.548	1.923	1.606
Day 5	1.568	1.902	1.627
Day 6	1.644	2.183	1.819
Day 7	1.659	2.207	1.976
Total Absorption	.587 lbs/cubic foot	1.122 lbs/cubic foot	.886 lbs/cubic foot

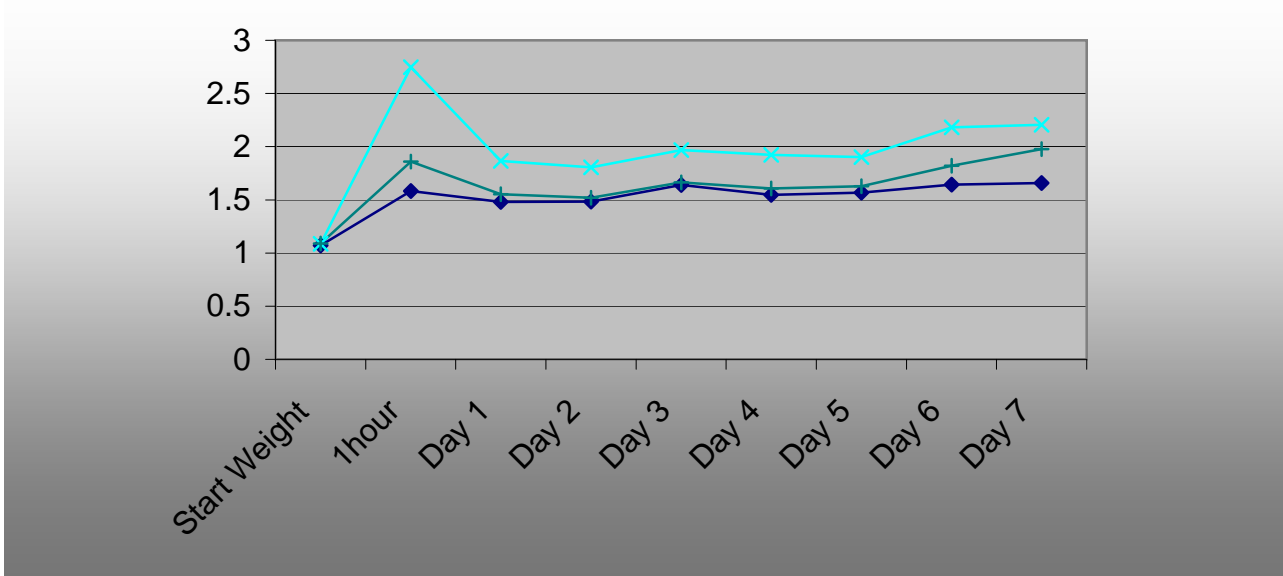

**Bottom Right", "Middle" and "Top Left" specify location of testing sample from full billet.

